

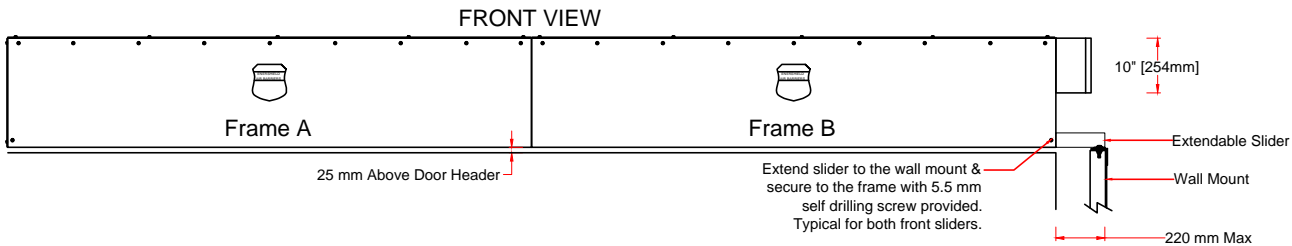


Vertical or High Lift OH Door Shown
Consult Factory for standard lift door installations

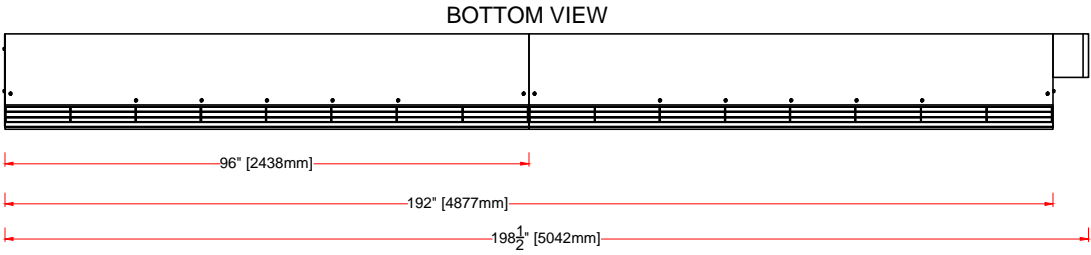


Min of 75 mm clearance between barrier and open door. Door not shown.


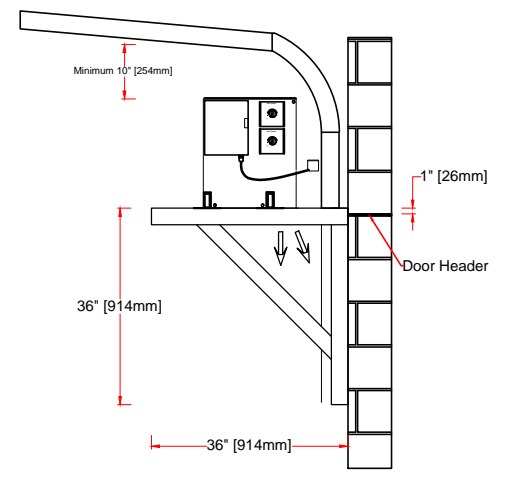


Slider Mounting Detail

Field drill 13 mm holes into the wall mount and bolt sliders with the 12 mm hardware provided

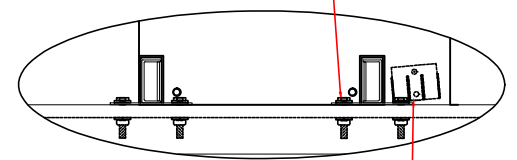

Adjust the diffuser 10-15 degrees towards the exterior of the building. Confirm diffuser adjustment after power has been supplied to the Air Barrier. See owners manual.

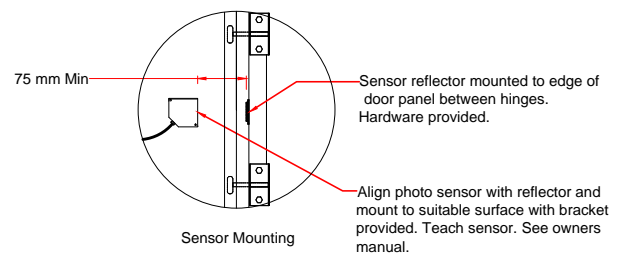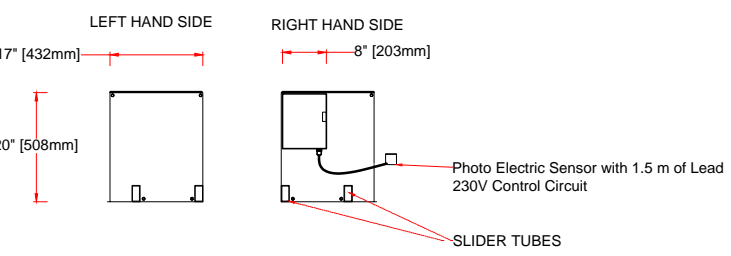

CE CERTIFIED

ENERSHIELD EUROPE
Calderhead Road
Shotts Lanarkshire Scotland
Tel.+44(0)1501 826501 FAX+44(0)1501 826501
E-mail: enquiries@enershield.eu
www.enershield.eu

ENERSHIELD AIR CURTAIN	
VOLTAGE 220V 1phase 50 Hz	Blowers 8
Motor (s) 8 @ 0.35 Kw = (2.8 Kw total)	DATE ORDERED
2.85 amps ea. = 22.8 amps FLA	DATE SHIPPED

DURASHIELD	DS-192
Air Velocity (fpm) (m/s)	4500/22.9
Air Volume (cfm) (l/s)	11300/5333
Total Kw/watts	2.8/2800W
Weight lbs/Kg	800lbs/364Kg