




Vertical or High Lift OH Door Shown
Consult Factory for standard lift door installations

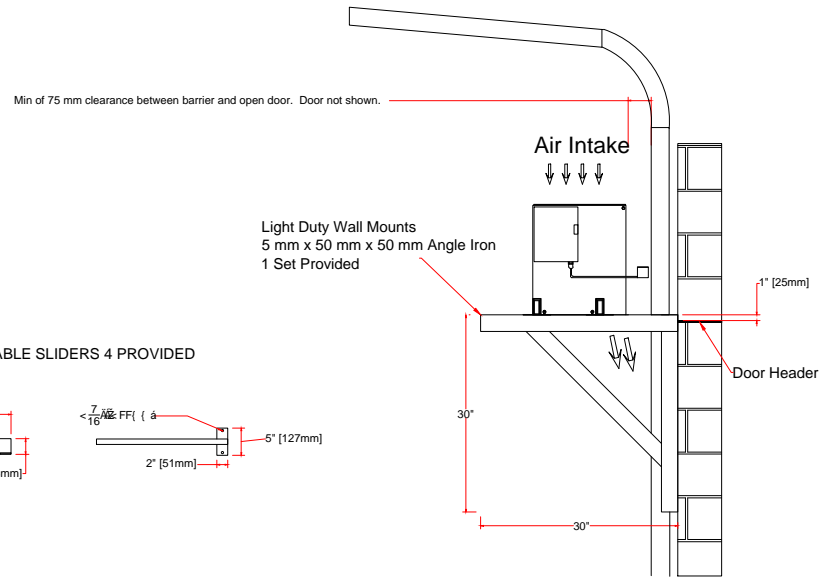

EXTENDABLE SLIDERS 4 PROVIDED



Slider Mounting Detail

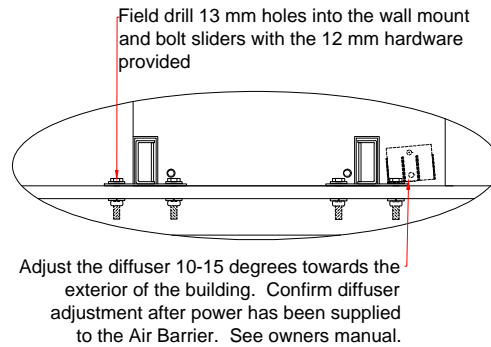

CE CERTIFIED

ENERSHIELD EUROPE

Calderhead Road

Shotts Lanarkshire Scotland

Tel.+44(0)1501 826501 FAX+44(0)1501 826501

E-mail: enquiries@enershield.eu

www.enershield.eu

ENERSHIELD AIR CURTAIN

VOLTAGE 230V 1phase 50 Hz	Blowers 5	DURASHIELD	DS-120	Project:
		Air Velocity (fpm) (m/s)	4500/22.9	
Motor (s) 5 @ 0.35 Kw = (1.75 KW total) 2.83 amps ea. = 14.1 amps FLA		Air Volume (cfm) (l/s)	14,125/6666	Tag:
		Total Kw/watts	1.75/1750	
		Weight lbs/Kg	500/227	