

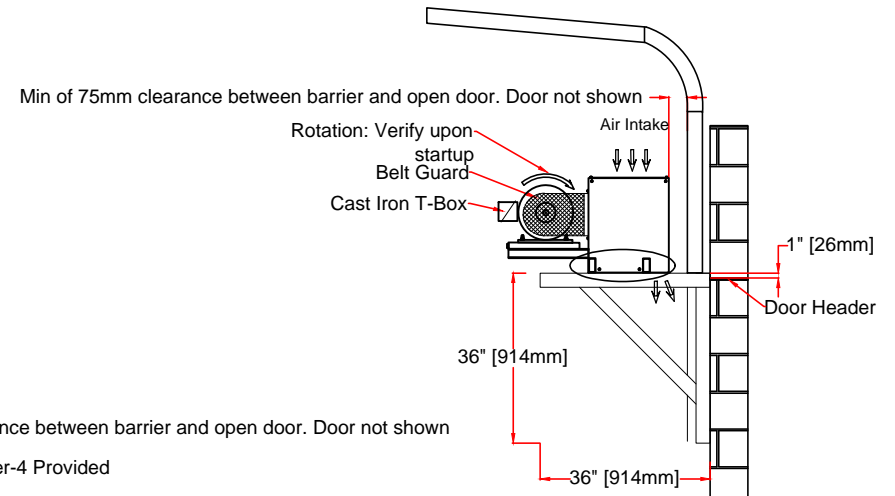


Vertical or High Lift OH Door Shown
Consult Factory for standard lift door installations

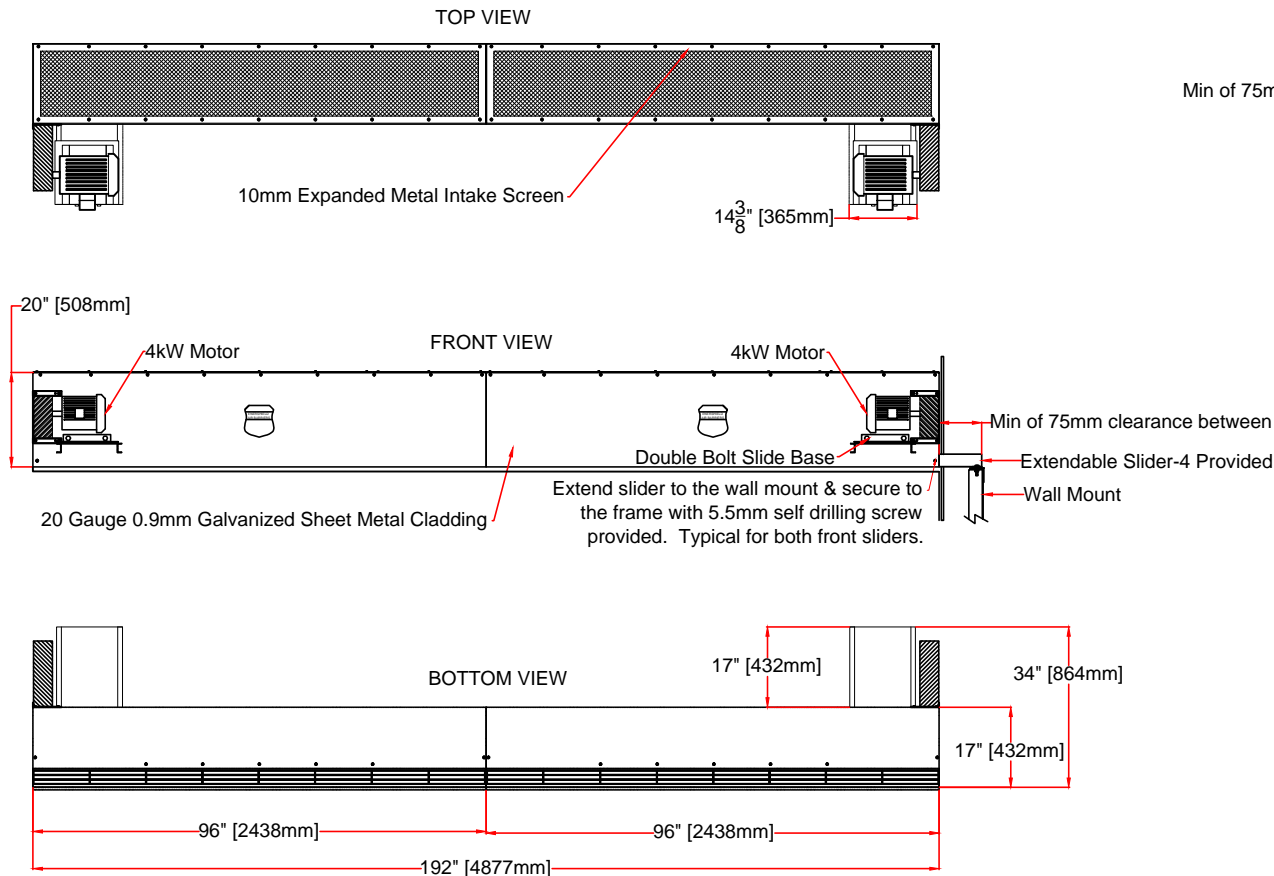

Field drill 12mm holes into the wall mount and bolt sliders with the 13mm hardware provided

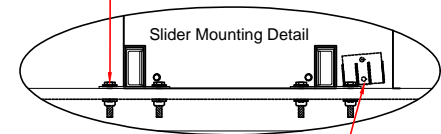

Adjust the diffuser 10-15 degrees towards the exterior of the building. Confirm diffuser adjustment after power has been supplied to the Air Barrier. See owners manual.

CE CERTIFIED

ENERSHIELD EUROPE Calderhead Road Shotts Lanarkshire Scotland Tel.+44(0)1501 826501 FAX+44(0)1501 826501 E-mail: enquiries@enershield.eu www.enershield.eu	DURASHIELD-HD		DURASHIELD-HD	DSH-192
	Voltage 400/680V 3 Phase 50HZ	Blowers	Air Velocity (fpm) (m/s)	5500/27.9
	Motor(s) 2 @ 4kW 1440RPM 8.12/4.71 FLA	8	Air Volume (cfm) (l/s)	25,800/12,176
			Total watts (kW)	8
			Weight lbs/Kg	1056 lbs/480 Kg