



Vertical or High Lift OH Door Shown
Consult Factory for standard lift door installations

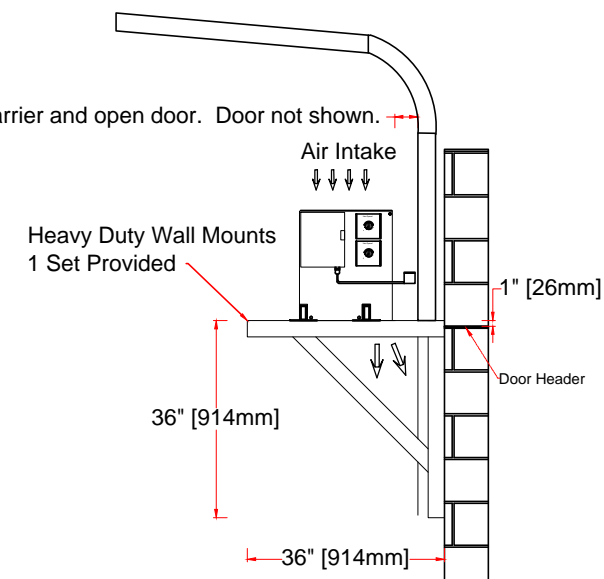


Slider Mounting Detail


Field drill 13 mm holes into the wall mount and bolt sliders with the 12 mm hardware provided

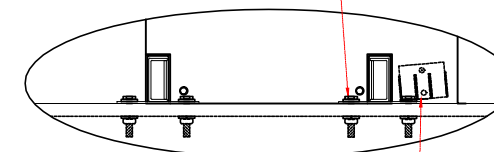

Adjust the diffuser 10-15 degrees towards the exterior of the building. Confirm diffuser adjustment after power has been supplied to the Air Barrier. See owners manual.

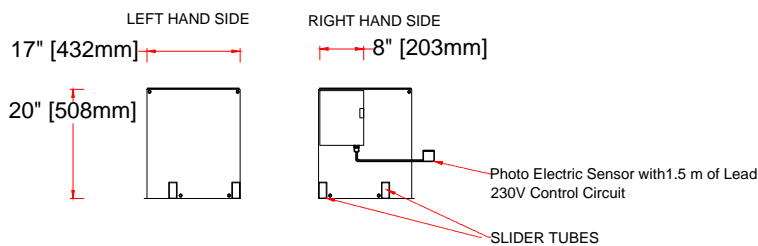

EXTENDABLE SLIDERS 4 PROVIDED

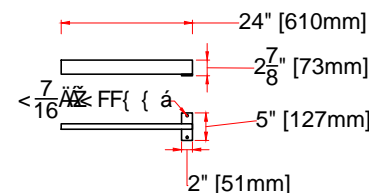

CE CERTIFIED

ENERSHIELD EUROPE

Calderhead Road

Shotts Lanarkshire Scotland

Tel.+44(0)1501 826501 FAX+44(0)1501 826501

E-mail: enquiries@enershield.eu

www.enershield.eu

ENERSHIELD AIR CURTAIN

VOLTAGE
230V 1phase 50 Hz

Motor (s)
7 @ 0.35 KW = (2.45 Kw total)
2.83 amps ea. = 19.8 amps FLA

Blowers
7
DATE
ORDERED
DATE
SHIPPED

DURASHIELD	DS-168
Air Velocity (fpm) (m/s)	4500/22.9
Air Volume (cfm) (l/s)	9888/4666
Total Kw/watts	2.45/2450W
Weight lbs/Kg	750lbs/341Kg