

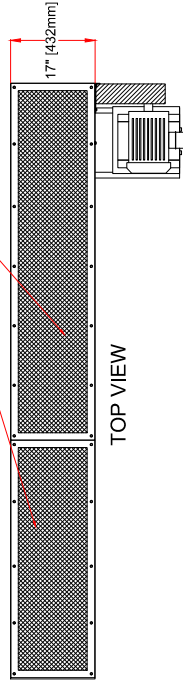



10 mm Expanded Metal Intake Screens

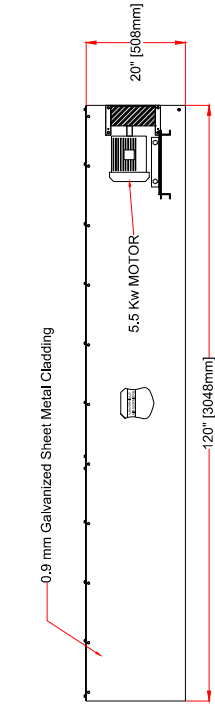

TOP VIEW

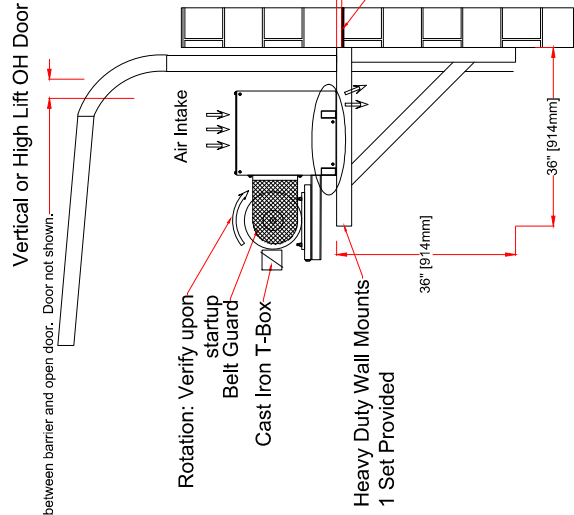


FRONT VIEW

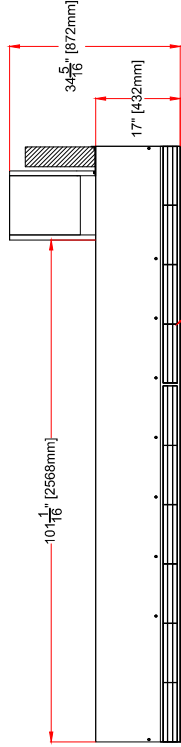

BOTTOM VIEW

Field drill 13 mm holes into the wall mount and bolt sliders with the 12 mm hardware provided



Adjust the diffuser 10-15 degrees towards the exterior of the building. Confirm diffuser adjustment after power has been supplied to the Air Barrier. See owners manual.

CE Certified

ENERSHIELD EUROPE

Calderhead Road

Shotts Lanarkshire Scotland

Tel. +44(0)1501 826501 FAX+44(0)1501 826501

E-mail: enquiries@enershield.eu

www.enershield.eu

DURASHIELD-HD

Voltage
400/600V/3/ 50Hz
Motor(s) 1 @ 5.5 Kw
IE2, IP55, 1460 RPM
10.5/6.09
Amps FLA

DURASHIELD-HD

Air Velocity (fpm) (m/s)

5500/27.9

Air Volume (cfm) (l/s)

16,125/7610

Total Kw/watts

5.5 Kw/6500

Weight lbs/Kg

660 / 300

DSH-120