




Vertical or High Lift OH Door

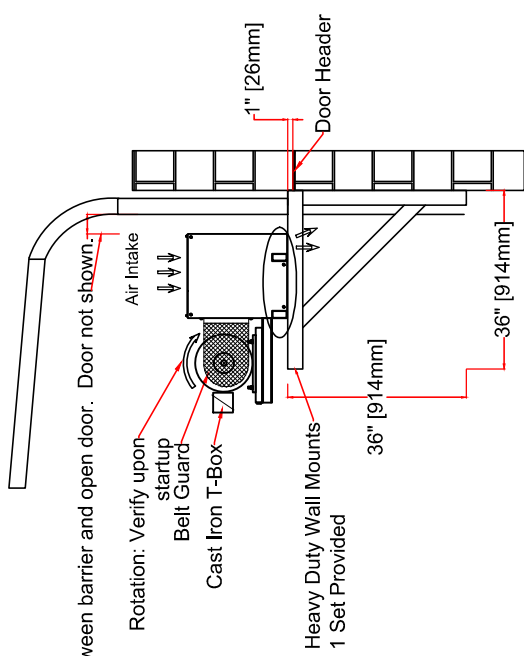


Min of 75mm clearance between barrier and open door. Door not shown.

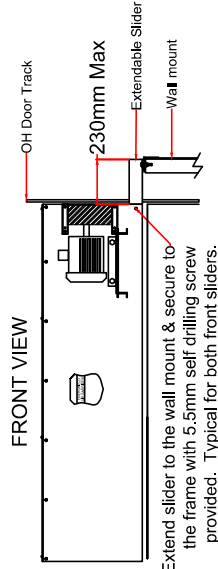

Extend slider to the wall mount & secure to the frame with 5.5mm self drilling screw provided. Typical for both front sliders.

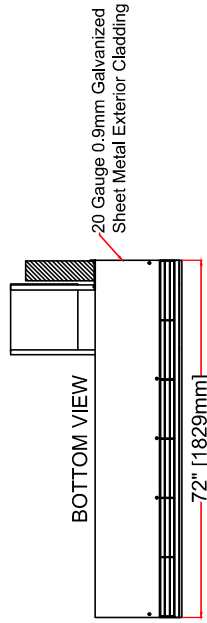

Field drill 12mm holes into the wall mount and bolt sliders with the 13mm hardware provided

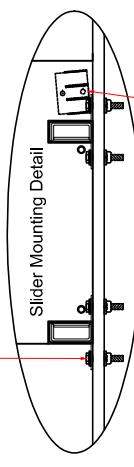

Adjust the diffuser 10-15 degrees towards the exterior of the building. Confirm diffuser adjustment after power has been supplied to the Air Barrier. See owners manual.

CE Certified

ENERSHIELD EUROPE Calderhead Road Shotts Lanarkshire Scotland Tel. +44(0)1501 826501 FAX+44(0)1501 826501 E-mail. enquiries@enershield.eu www.enershield.eu	DSH-72 Right Hand Motor		DURASHIELD-HD	DSH-72
	Voltage	Blowers		Air Velocity (fpm) (m/s)
Motor(s)	400/690V 1 Phase 50Hz	3		5500/27.9
1 @ 4kW, 1440 RPM				Air Volume (cfm) (l/s)
8.12/4.71 FLA				9675 / 4566
				Total watts (kW)
				4
				Weight lbs/Kg
				390 / 177