
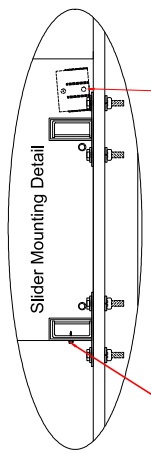


Vertical or High Lift OH Door

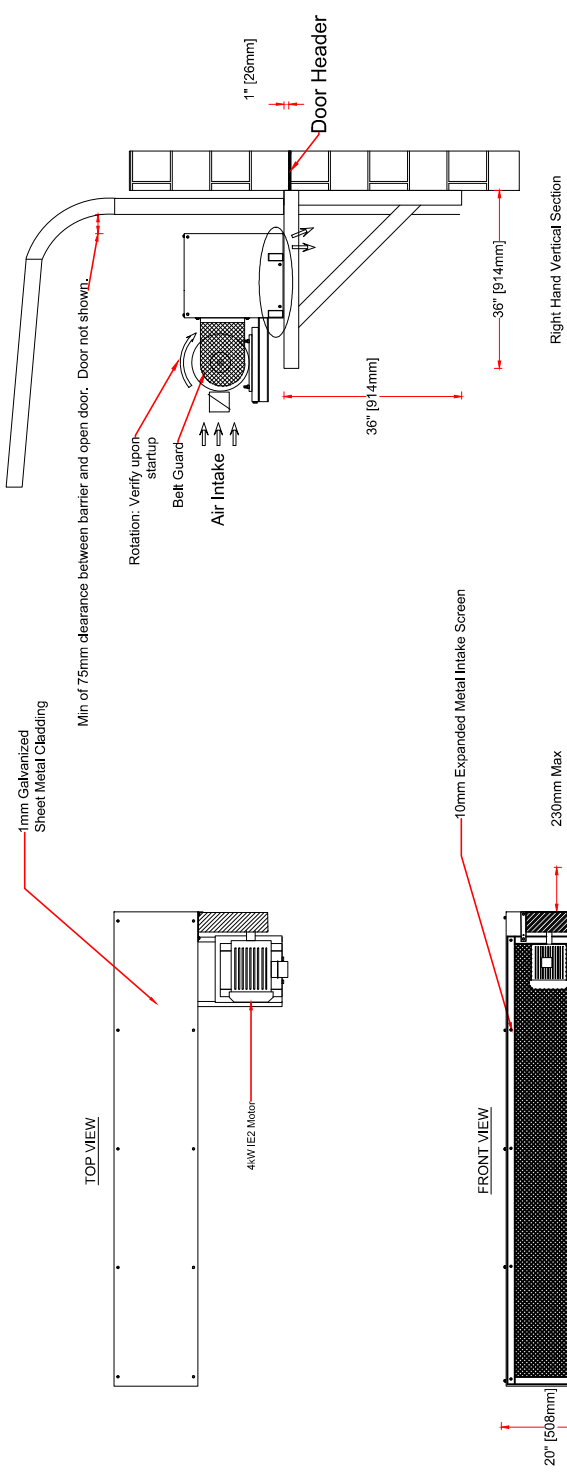

5.5mm Self Drilling Screw

Field drill 12mm holes into the wall mount and bolt sliders with the 13mm hardware provided

Adjust the diffuser 10-15 degrees towards the exterior of the building. Confirm diffuser adjustment after power has been supplied to the Air Barrier. See owners manual.

CE Certified

ENERSHIELD EUROPE
 Calderhead Road
 Shotts Lanarkshire Scotland
 Tel +44(0)1501 826501 FAX+44(0)1501 826501
 E-mail: enquiries@enershield.eu
 www.enershield.eu

Project:	DURASHIELD-HD		DURASHIELD-HD	DSH-96
Engineer:	Voltage 400/690V 3 Phase 50Hz	B lowers	Air Velocity (fpm) (m/s)	5500/27.9
Tag:	Motor(s) 1 @ 4kW Hp, 1440 RPM, IE2 FLA 8.12/4.71	4	Air Volume (cfm) (l/s)	12,900/6088
Location:			Total watts (kW)	4
			Weight lbs/kg	520 lbs/ 237 Kg