


Bottom View





Full Length Articulating Nozzle

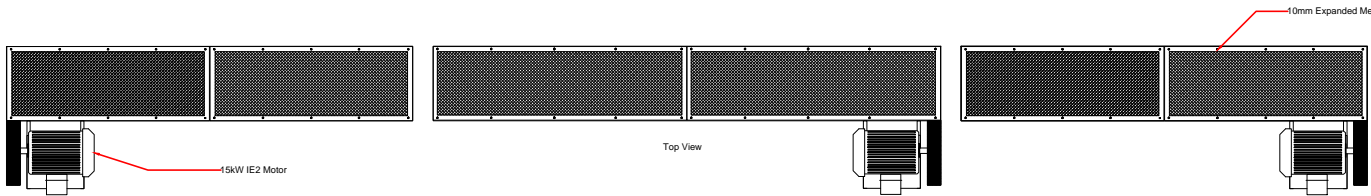

Top View

15kW IE2 Motor

10mm Expanded Metal Intake Screen

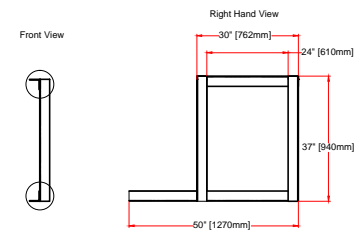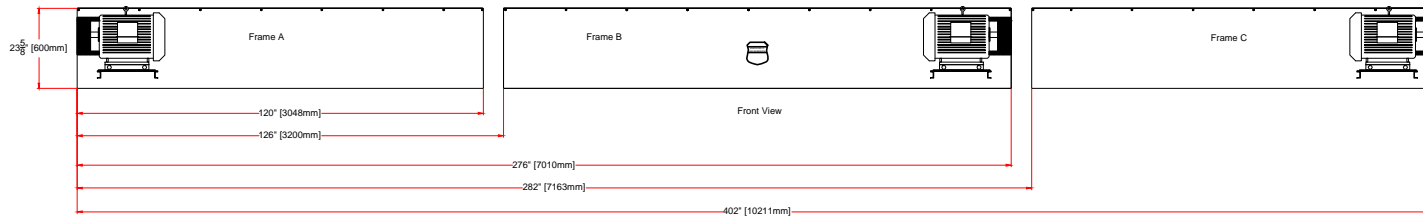

CE Certified

ENERSHIELD EUROPE
Calderhead Road
Shotts, Lanarkshire, Scotland
Tel. +44(0)1501 826501 FAX+44(0)1501 826501
E-mail: enquiries@enershield.eu
www.enershield.eu

ENERSHIELD AIR BARRIER

VOLTAGE
400/690V 3phase 50 Hz
Motor (s)
3 @ 15kW total
28.7/16.6 amps FLA per motor
86.1/49.8 amps FLA total

Xtremeshield	XS-390
Air Velocity (fpm) (m/s)	7500/38.1
Air Volume (cfm) (l/s)	77,432/36,544
Total watts (kW)	45Kw
Weight lbs/Kg	2740/1246

Project:	Tag:
Engineer:	Location:
Purchaser:	